




PTFE Thread Seal Tape

Premium Quality to BS 7786 : 1995



- Scope of Use : For the purpose of sealing the gaps between threads of metal/plastic tubes for plumbing, machinery and chemistry applications.
- Technical Features : Excellent weathering resistance, insulation, anti-corrosion, anti-aging, and can be used in oxidizing agent for a long term.
- Quality Certification : Tested by laboratory recognized by HK WSD for the necessary quality compliance.
- Characteristics : Cost effective, easy to use, low coefficient of friction, non-stick surface, wide working temperature from -180°C ~ +260°C.

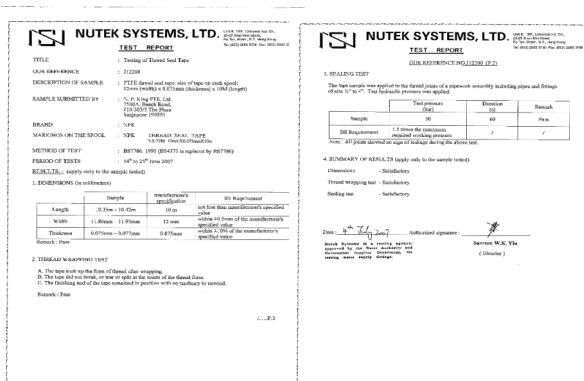

Specification and Packing Information

Quality conform to BS7786 : 1995	Available Size	12mm x 0.075mm x 10M (Width x Thickness x Length)
	Density	0.35g/cm ³
	Heat / Cold Resistance	+ 370°C / - 190°C
	High Pressure Resistance	150 ~ 200 kg/cm ³
	Tensile Strength / Elongation %	≥ 8 MPa / ≥ 25%
Packing (subject to change by vendor)	Carton Box : Outer / Inner	1,000 Pcs / 100 Pcs
	Quantity per Pallet : FCL / LCL	30,000 Pcs / 24,000 Pcs
	Container Load : 20' / 40'	360,000 Pcs / 780,000 Pcs

Your agent:

E-mail: admin@npking.com
PURDON KING (int'l) LTD

Information contained in this brochure is provided as a guide only. Purdon King (int'l) Ltd does not warrant that the information is accurate or without error or omissions. Purdon King (int'l) Ltd reserves the right to correct any errors or misprints.